

3X STEREO AV RF MODULATOR WITH IR CONTROL

NEW

COMPOSITE VIDEO

STEREO AUDIO

GAIN CONTROL

RF VIA COAX



Pro.2
Providing AV Solutions

RFX3IR
3 Input RF
Modulator

CODE: 37400052


CONTROL & DISTRIBUTE UP TO 3 AV DEVICES

This versatile 3 channel modulator can accept 3 video & audio sources such as satellite receivers, VCRs and DVD players and display them on any channel on any number of TVs around your home or business.

**PLL CRYSTAL CONTROLLED
OSCILLATOR CIRCUITRY**
LONGER LIFE, NO CHANNEL DRIFT
AND SIMPLE SET UP

Features:

- High gain RF output with high stability PLL technology
- Channels 21~69
- LED display with front source and channel selector
- Small and compact aluminium housing design
- PAL G » PAL I » PAL K » NTSC system
- Channel indication: 3 digital
- Converts Audio/Video signals into TV signal
- Suitable for home distribution
- Adjustable UHF output channels
- Remote control A/V sources with IR extender

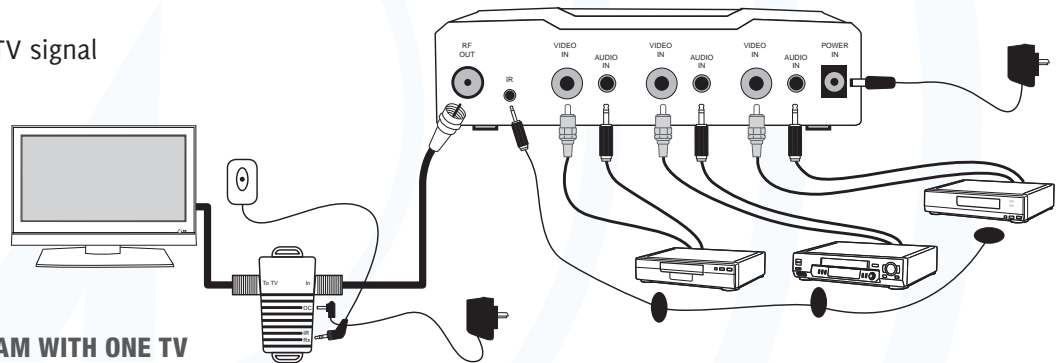

SETUP DIAGRAM WITH ONE TV
You may also connect the RF output to multiple TVs.

Specifications:

- TV Standard: PAL-G » PAL-I » PAL-K » NTSC
- Frequency Range: 470~862 MHz » NTSC: 470~885 MHz
- Max. Output level: 85 dB uV
- Inputs: 3x Video: RCA jack
» 3x Audio: 3.5mm stereo jack
- Output: F type RF out
- Remote Control Frequency: 10.7MHz
- IR Carrier Frequency: 32~38KHz
- Power Supply: 9 V DC 300mA for modulator
» 7.5 V DC 300mA for diplexer
- Dimensions: 133 (L) x 90 (W) x 34 (H) mm

Accessories:

