


# HDMI to DVI Converter

Model No.HD01

## Operating Instructions

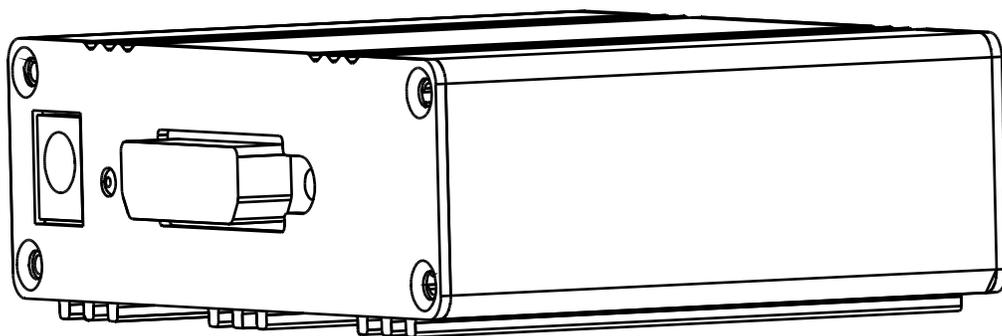

## FEATURES

- Easy to Use: Install in seconds, no need for setting.
- Conversion: It could convert HDMI into DVI and R/L audio or SPDIF digital audio.
- HDCP compliant.

## TABLE OF CONTENTS

Introduction

Package Contents

Panel Descriptions

Connect and Operation

Specification

Maintenance

Product Service

## INTRODUCTION

HD01 is a HDMI to DVI converter. It could convert HDMI into DVI and R/L audio or SPDIF digital audio. HD01 has the ability of buffering and amplifying. It achieves long-distance transmission of HDMI signal of more than 15 meters.


HD01 offers solutions for digital entertainment center, HDTV retail and show site, HDTV, STB, DVD and projector factory, noise, space and security concerns, data center control, information distribution, conference room presentation, school and corporate training environments.

## PACKAGE CONTENTS


1. Main unit.HDMI-DVI converter
2. 5V DC power adapter.
3. Operating instructions.

## PANEL DESCRIPTIONS

Front Panel

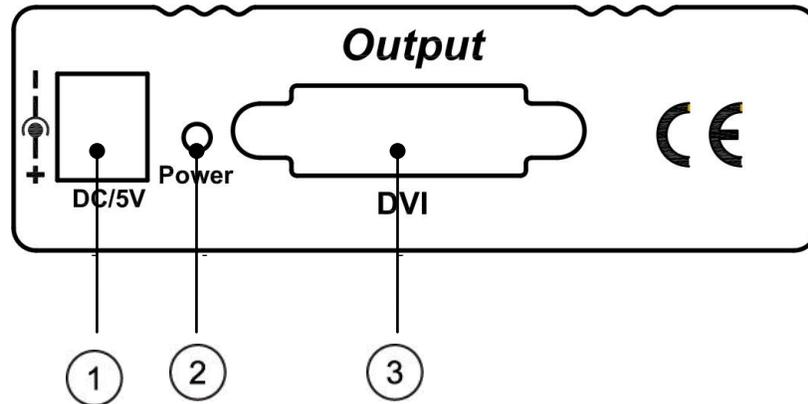

Rear Panel

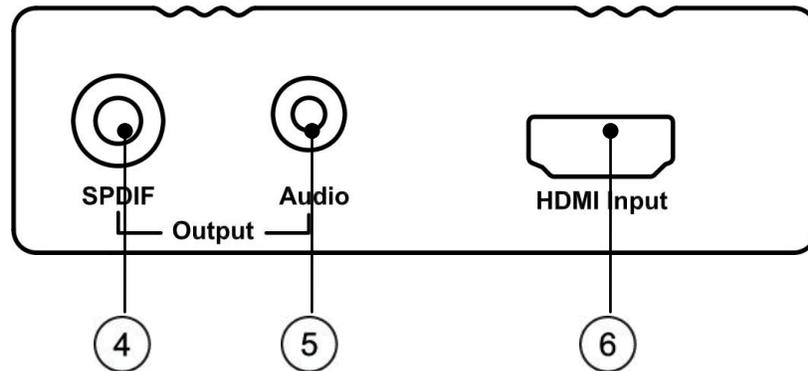

1. Power input
2. Indicator of power input
3. DVI vide output
4. SPDIF digital audio output
5. R/L audio output
6. HDMI input

## CONNECT AND OPERATION

- 1) Connect the HDMI input source into HD01. (Input cables are optional)
- 2) Connect the DVI device into the DVI Output slot in the front of HD01.
- 3) Insert the DC side of 5V power supply into HD01 and then connect the AC side of the power supply into the wall outlet.

Insert / Extract cables gently.

## SPECIFICATIONS

Operating Temperature Range	-5 to +35°C (-41 to +95 °F)
Operating Humidity Range	5 to 90 % RH (no condensation)
Input Video Signal	0.5-1.0 volts p-p
Input DDC Signal	5 volts p-p (TTL)
Vertical Frequency Range	60Hz
Maximum Single Link Range	1280 x 1024, 1080P
Output Video	HDMI+HDCP1.0/1.1
Power Supply	5VDC
Power Consumption	3.75watts (Max)
Dimensions	67mmW×88mmH×28mmD/2.6"W×3.5"H×1.1"D
Mass (Main Unit)	680gs/1.5lb

**\*Note:** Specifications are subject to change without notice. Mass and dimensions are approximate.

## MAINTENANCE

Clean this unit with a soft, dry cloth. Never use alcohol, paint thinner or benzine to clean this unit.

## PRODUCT SERVICE

- 1) **Damage requiring service:** The unit should be serviced by qualified service personnel if:
  - (a) The DC power supply cord or AC adaptor has been damaged;
  - (b) Objects or liquids have gotten into the unit;
  - (c) The unit has been exposed to rain;
  - (d) The unit does not operate normally or exhibits a marked change in performance;
  - (e) The unit has been dropped or the cabinet has been damaged.
- 2) **Servicing Personnel:** Do not attempt to service the unit beyond that described in these operating instructions. Refer all other servicing to authorized servicing personnel.
- 3) **Replacement parts:** When parts need replacing ensure the servicer uses parts specified by the manufacturer or parts that have the same characteristics as the original parts. Unauthorized substitutes may result in fire, electric shock, or other hazards.
- 4) **Safety check:** After repairs or service, ask the servicer to perform safety checks to confirm that the unit is in proper working condition.