

HDMI AV CONVERTERS

HD01 HDMI TO DVI CONVERTER



HD01 is a HDMI to DVI converter. It converts HDMI into DVI and R/L audio or SPDIF digital audio. HD01 has the ability of buffering and amplifying. It achieves long-distance transmission of HDMI signal of more than 15 meters.

Model: HD01

Order Code: 64550045


Warranty: 12 months

Features

- Operating Temperature Range: -5 to +35°C (-41 to +95 °F)
- Operating Humidity Range: 5 to 90 % RH (no condensation)
- Input Video Signal: 0.5-1.0 volts p-p
- Input DDC Signal: 5 volts p-p (TTL)
- Vertical Frequency Range: 60Hz
- Maximum Single Link Range: 1280 x 1024, 1080P
- Output Video: HDMI+HDCP1.0/1.1
- Power Supply: 5VDC
- Power Consumption: 3.75watts (Max)
- Dimensions: 6.7cm×8.8cm×2.8cm
- (Main Unit): 680gs/1.5lb

PACKAGE CONTENTS

- Main unit. HDMI-DVI converter
- 5V DC power adapter.
- Operating instructions.

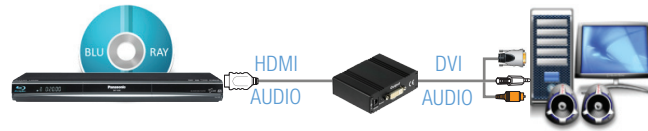

HCS01 HDMI TO COMPOSITE SVIDEO



HCS01 converter is designed to convert HDMI to either Composite Video or S-Video. It allows the devices only equipped HDMI output to be connected to CRT TV. It is mostly applied in AV equipment testing.

Model: HCS01

Order Code: 64550050


Warranty: 12 months

Features

- Input HDMI resolution: 480P(60Hz), 576P(50Hz), 720p (50Hz / 60Hz), 1080i (50Hz / 60Hz), 1080p (50Hz / 60Hz).
- Output signal: Composite Video (1.0Vpp), S-Video(Y:1.0Vpp, C:0.3Vpp).
- Output Video Systems: PAL/NTSC.
- Output video impedance: 75Ω
- Compatible with HDMI 1.3 and HDCP
- Power Supply: DC15V
- Working Temperature: -25C ~ 75C
- Working Humidity: 10% – 60%
- Dimensions: 12.7X10.6X3.5 cm

PACKAGE CONTENTS

- 5V 1A DC out power adapter.
- User Manual.
- S-Video Cable
- RCA Cable

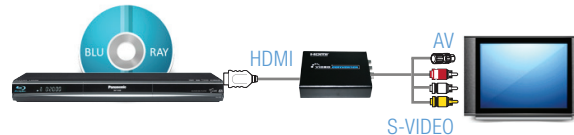

CSD01 COMPOSITE SVIDEO TO HDMI CONVERTER



CSD01 RCA Composite video and S-video to HDMI Converter takes either Composite Video or S-Video as input and converts it to HDMI 1080P. It allows older analog devices to be integrated into HD home theater system. Plug and Play, no software driver is needed.

Model: CSD01

Order Code: 64550055

Warranty: 12 months

Features

- Up-scales Composite Video or S-Video up to full HD 1080P.
- HDMI output is optional at 720P/60Hz or 1080P/60Hz.
- Input video systems – NTSC and PAL is automatically detected and adjusted.
- Composite Video and S-Video can maintain simultaneous, and be changed via a switch.
- Input and output signal resolution is automatically stored when powered on again.
- Dimensions: 12.7×10.6×3.6cm

PACKAGE CONTENTS

- 5V 2A DC out power adapter.
- User Manual.



SCAN with your MOBILE for more INFO