


DVR16CH 16 CHANNEL H.264 NETWORK DVR

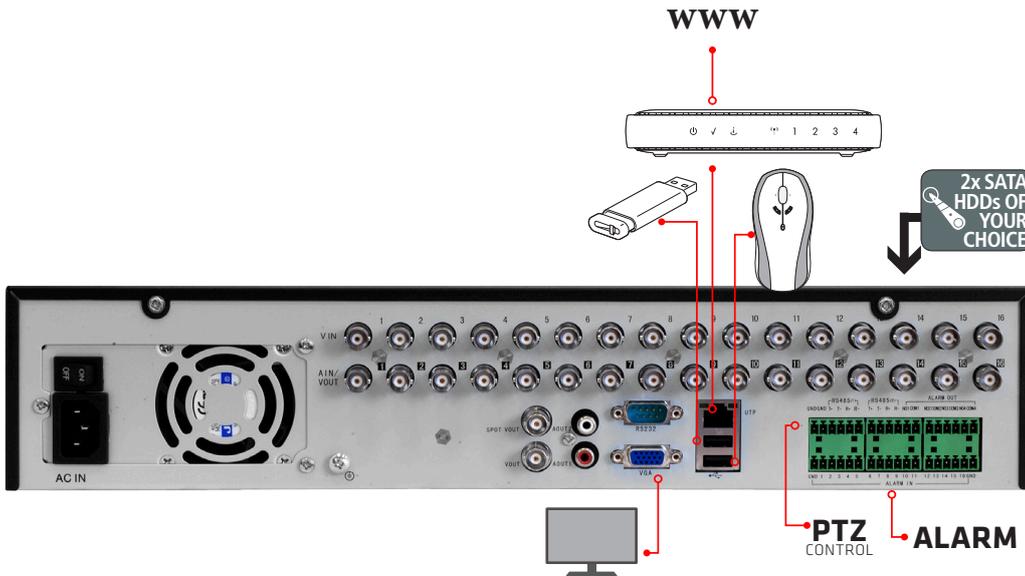

- H.264 (main profile)/ MJPEG video compression
- Simultaneous 1/4CH playback
- Multiplex, PPPoE, DHCP, SATA HDD support
- USB2.0 backup
- Dual stream bit
- Web access via IE
- **Email Alert**
Sends log, picture, IP information to the appointed mailbox when alarm is activated
- 16-bit colour menu with user friendly OSD
- Support schedule recording, 120 preset schedule tasks
- Search recording by time and day

Compression	H.264 (main Profile)/ MJPEG
Video Connections	16x BNC video inputs/ 2x BNC + 1x VGA output
AUDIO	16CH BNC in/ 1CH RCA out with INTERCOM support
Display Resolution	D1: 704x576 (PAL) @ 25 FPS/ 704x480 (NTSC) @ 30 FPS
Recording Resolution	CIF: 352x288 (PAL) @ 25 FPS/ 352x240 (NTSC) @ 30 FPS (All real time flexible)
Recording Quality	5 Levels (Basic, Medium, Good, High, Best)
Recording modes	Manual, motion (396 grid blocks), Timer, Alarm trigger, Auto start, Pre-recording
Video output stream	16k-768kbps adjustable
Playback	4CH playback simultaneously
HDD	2x SATA interface, Max. 2TB HDD
ALARM	Input: 16CH / Output: 4CH
Mobile Support	iPhone, Symbian, Windows Mobile software
Network	RJ45, auto adapt 10/100M Ethernet, support PPPoE & DHCP
Backup	Flash drive or external hard disk via back USB 2.0 port
Mouse	USB1.1 port for connecting a USB mouse (included)
Communication port	RS485 port
Power supply	AC 220/230V 50/60HZ
Weight/ Size	11kg/ 440 (W) x 450 (H) x 100 (D) mm (2U)

Order Code: 43170810

Warranty: 12 months



Download Software

Download software for your iPhone from the app store (search for DvrClient) and from the DOSS web site for your Windows mobile or Symbian phone.



Included USB mouse

Easily setup your DVR using the included mouse



Included remote

Package contents:

- Remote control
- Mini USB Mouse
- Power supply
- User manual



CAN'T SCAN QR CODES?
DOWNLOAD SCANLIFE FROM YOUR APP MARKET.